NOTE FLOOR REQUIREMENTS

FOR PROPER ANCHOR EMBANKMENT FLOOR MUST BE A MINIMUM OF 4,000 PSI REINFORCED CONCRETE AT 6.00 IN. THICK

NOTE

-ELECTRICAL CONNECTIONS BETWEEN COLUMNS REQUIRED

-TOOLING PROVIDED BY CUSTOMER

PROPOSAL DRAWING

SPECIFICATIONS CHART	
LIFT DESCRIPTION - MHL2P ADJUSTABLE POSITIONER W/14" ROTATOR	
LIFT CAPACITY (LBS.)	15,000 LBS.
VERTICAL TRAVEL	68.50" (ADJUSTABLE)
MAX. ROTATIONAL TORQUE IN-LBS.	74,000 IN-LBS.
ELECTRICAL REQUIREMENTS	208/230V/460V 3-PH

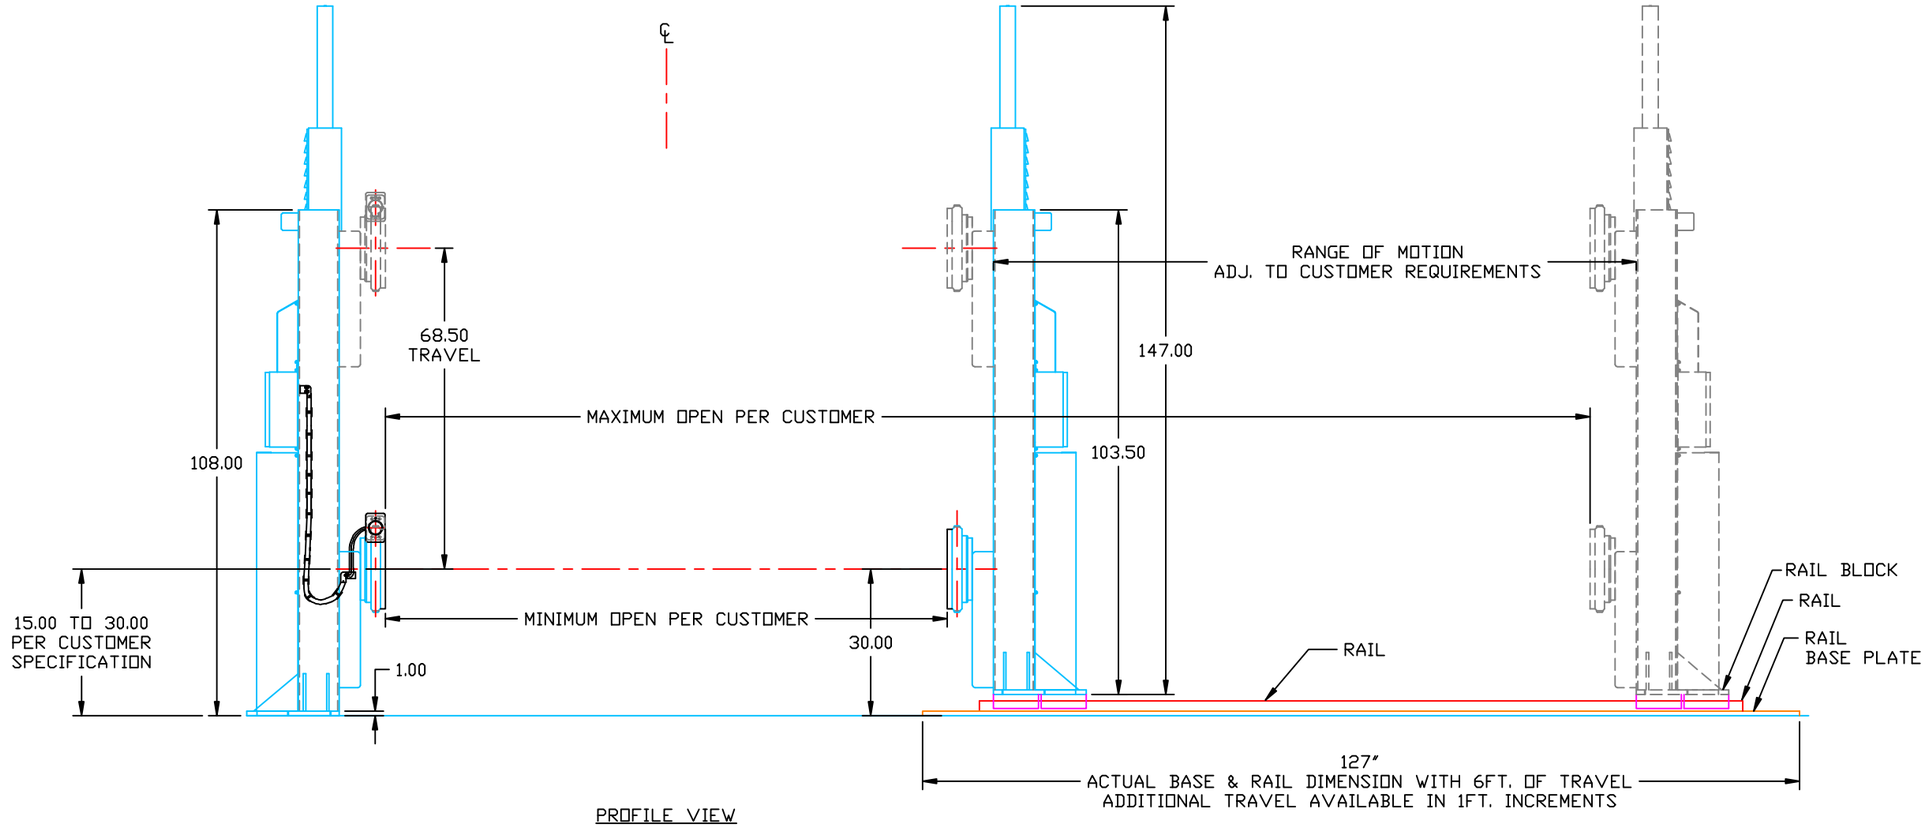

PROFILE VIEW

REV	E. C. R.	DATE	REV BY	CKD

UNLESS OTHERWISE SPECIFIED:

DECIMALS XX ± 0.06, XXX ± 0.010

CONCENTRICITY T.I.R. .005

ANGLES ± 1°

MACH SURFACE 125

DIMENSIONS IN ( ) ARE REFERENCE DIMS., NO TOLERANCES ARE IMPLIED.

THIRD ANGLE PROJECTION

BREAK ALL SHARP CORNERS

REMOVE ALL BURRS

ALL DIMENSIONS ARE IN INCHES.

ANSI Y14.5M STANDARDS APPLY

DRAWN BY:	DATE DRAWN:
MCS	10/21/11
CHECKED BY:	DATE CHECKED:
DG	10/21/11
MYLAR REV. #	MYLAR DATE
--	--
MYLAR #	SCALE:
--	1 : 24

THIS DOCUMENT CONTAINS INFORMATION WHICH IS THE PROPERTY OF A. L. M. CORP. AND IS PROVIDED ON A RESTRICTED BASIS. IT IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF A. L. M. CORP. AND MAY NOT BE COPIED, TRANSMITTED TO OTHERS, OR USED FOR MANUFACTURING PURPOSES WITHOUT THE WRITTEN PERMISSION OF A. L. M. CORP.

GENERIC

ALM CORPORATION
200 Benchmark Industrial Dr,
Streator, Illinois 61364

TITLE MHL2P ADJUSTABLE POSITIONER
15000 LBS CAPACITY

DRAWING NO. 090212-02

SHEET 1 OF 1